


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

RECOMMENDED PCB LAYOUT
 TOLERANCE IS ±0.05

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
E		REVISED PER ECO-18-008015	24MAY2018	AP DG

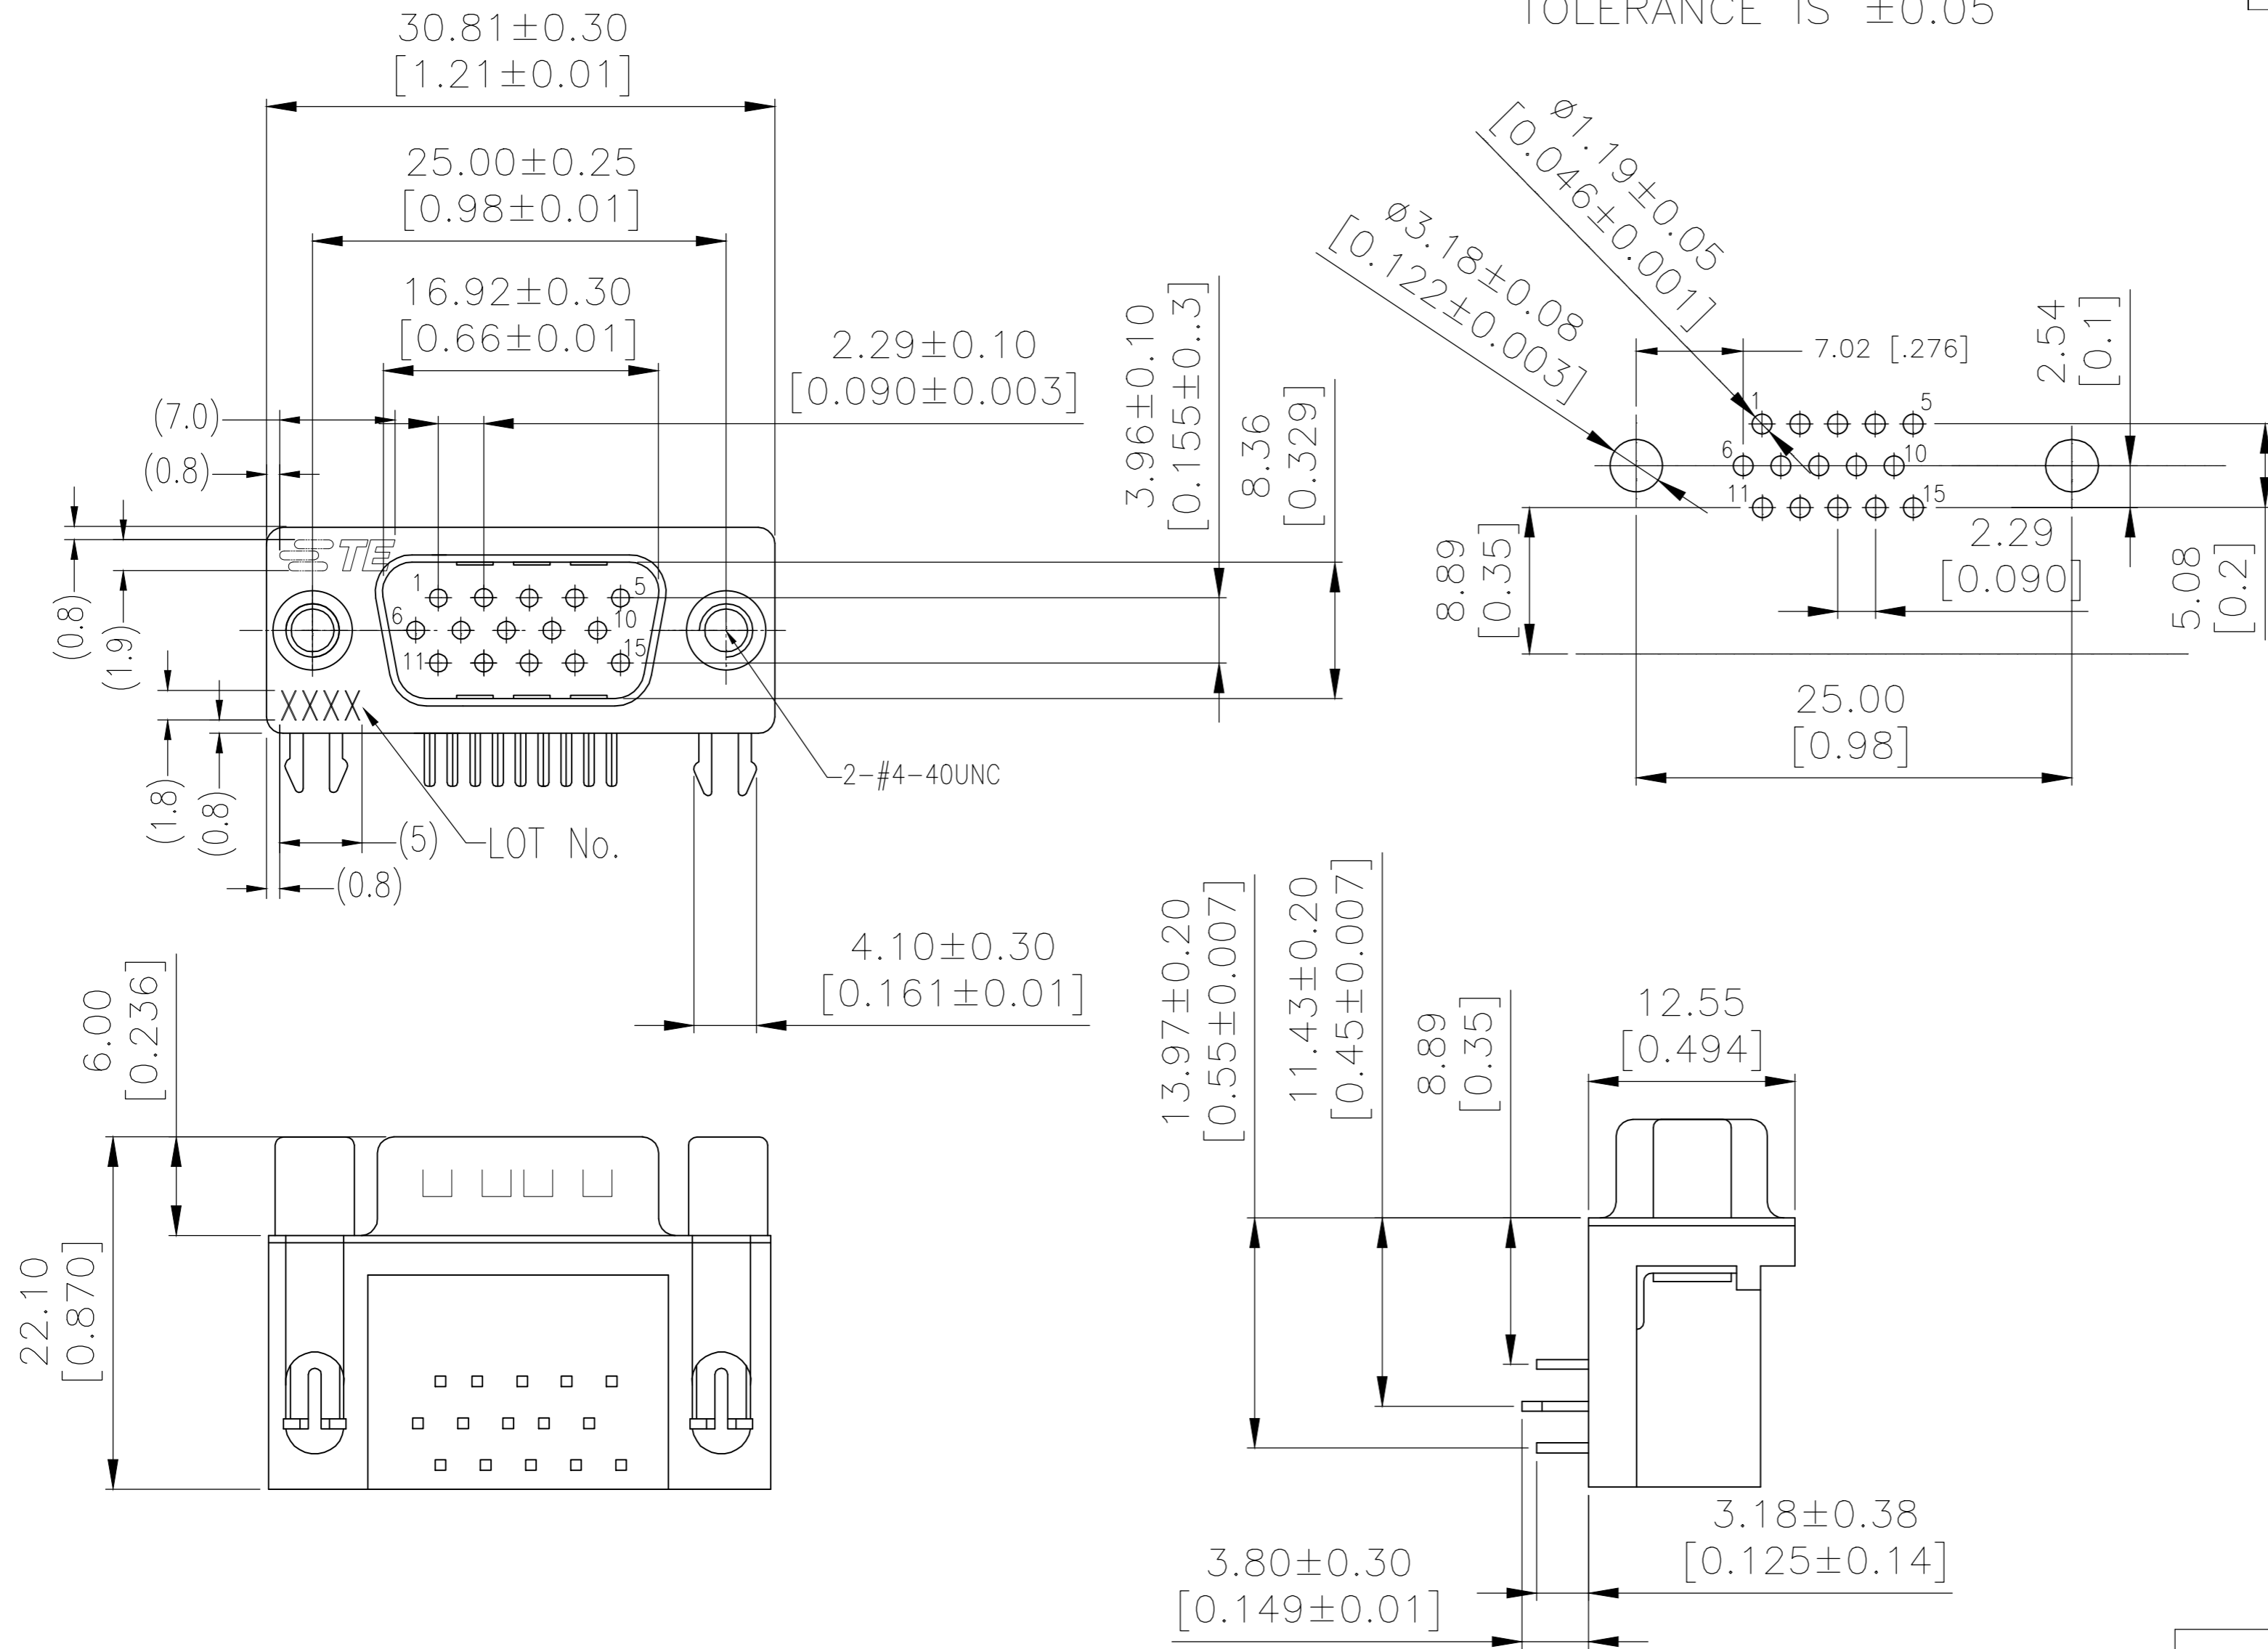

NOTES:
 Housing: PBT+30%GF(UL94V-0) BLACK
 Contact: Brass
 " GOLD PLATING ON CONTACT AREA
 100u" MATTE TIN PLATING ON SOLDERTAIL
 50u" NICKEL UNDERPLATED OVERALL
 Holddown: Brass, 100u" TIN OVER 50u" NICKEL
 Shell: Cold Roller Steel, Ni Plated
 Revit: Brass, Nickel Plating
 Nut: Brass, Nickel Plated
 LOT NUMBER "XXXX"
 ↳ Stands For Calendar Year
 ↳ Stands For Week Number

YES	30μ"Au	2311775-1
SCREWLOCK	Contact Area	P/N
	Plating	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN AJITH PAI 07MAR2017	STE TE Connectivity	
DIMENSIONS: mm		CHK DANIEL GORENC 07MAR2017		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD DANIEL GORENC 07MAR2017	NAME AMPLIMITE PLUG, HD22, RIGHT ANGLE, 15P	
0 PLC ± -		PRODUCT SPEC 108-130023	SIZE A2	
1 PLC ± -		APPLICATION SPEC	CAGE CODE 00779	
2 PLC ± 0.25			DRAWING NO C=2311775	
3 PLC ± -			RESTRICTED TO	
4 PLC ± -			SCALE 1:1	
ANGLES ± -			SHEET 1 OF 1	
FINISH		WEIGHT	REV E	
MATERIAL		CUSTOMER DRAWING		