


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00133	Connector, dc plug, 5.5x2.1xL18.5 mm, molding style, spring contacts	1	
2	30-00404	Wire, 2C TS, 24 AWG, UL2468, 300V, 80C, 3.0 mm, VW-1, PVC, 87A	1	
3	24-00006	Overmold, PVC	1	black

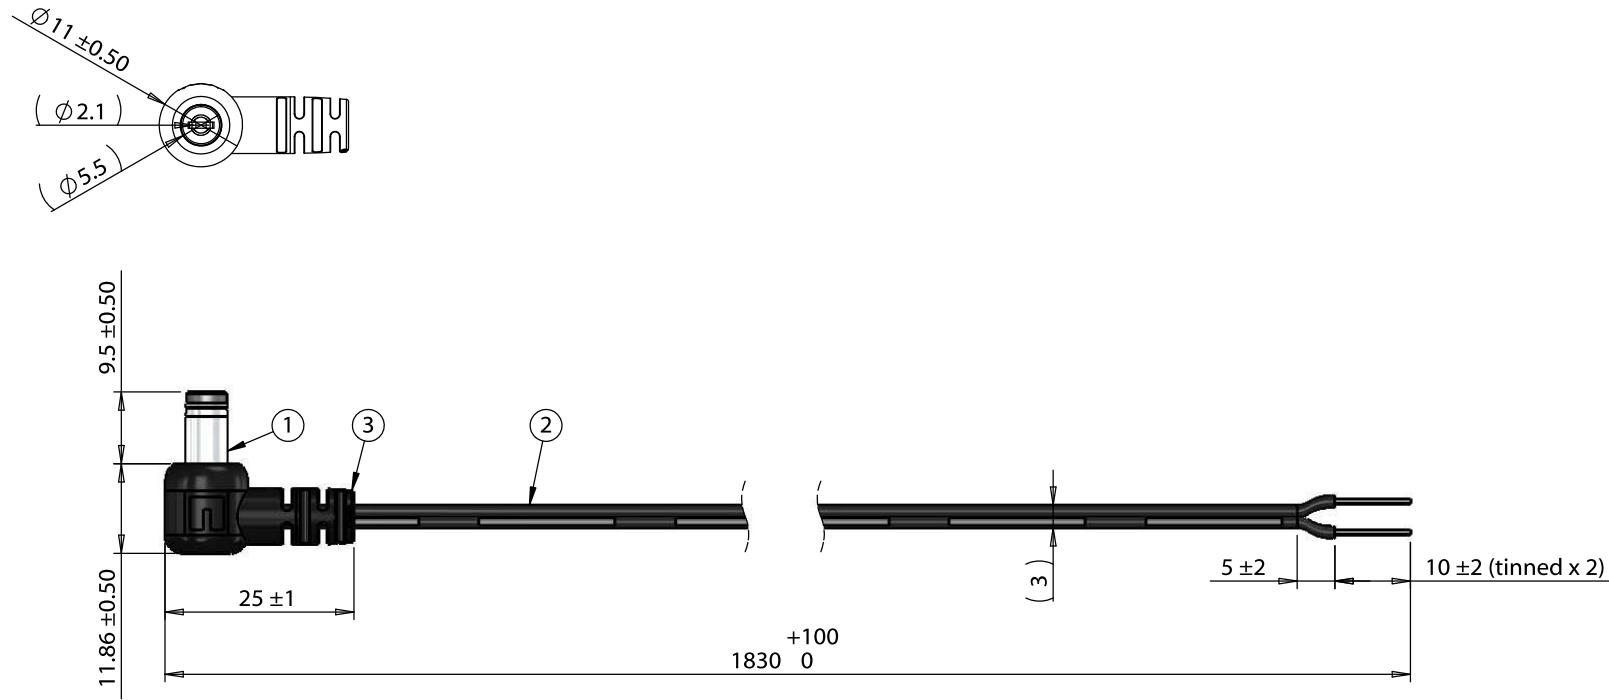

**Notes:**  
Functionally equivalent components may be substituted

Wiring Diagram	
50-00133	wire color
center	black with stripe
sleeve	black

Revision:	Date:	Description:	Prepared: <b>GL</b> <small>Digitally signed by GL Date: 2018.02.06 13:41:31 -08'00"</small>	Notes:  RoHS compliant  Function test: no open, no short circuit, no intermittent	<b>TENSILITY</b>  tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	02/06/2018	Initial release	Verified: <b>JP</b> <small>Digitally signed by JP Date: 2018.02.13 14:57:26 -08'00"</small>	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description:  Cable, 1830 mm, 5.5x2.1x9.5 mm 90° 50-00133 dc plug to 10 mm tinned, 24 AWG, UL2468, 30-00404 wire
					Size: A Part number: <b>10-02503</b>
					Scale: 1:1  Sheet 1 of 1